




Non Retrofit Single U

Finoglow Non-Retrofit Single 'U' has a 'U' shaped tube and is used in conventional ballasts. Single capped lamps, they are very compact in size, making them ideal for use in creative lighting. These lamps are extremely slender and small. They last up to 8 times longer when compared with ordinary bulbs. They have a G23 base, a built-in starter and RF suppression capacitor.

Applications: For domestic purpose - The lamps fit all types of standard equipment and are used in decorative home lighting fixtures.

For commercial purposes - For ceiling lighting or as a down lighter in Restaurants, Hotels, Shops, Corridors and Offices.

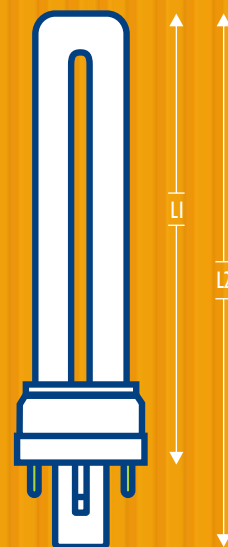

Code	Lamp Description	Color Temperature	Luminous Flux	Cap	Length L1 (mm) Max	Length L2 (mm)
05N131	Finoglow SU -5W/865 Cool Daylight Lamp	6500	235	G23	85	108
05N132	Finoglow SU -5W/840 Cool White Lamp	4000	250	G23	85	108
05N134	Finoglow SU -5W/827 Warm White Lamp	2700	250	G23	85	108
07N131	Finoglow SU -7W/865 Cool Daylight Lamp	6500	375	G23	114	137
07N132	Finoglow SU -7W/840 Cool White Lamp	4000	400	G23	114	137
07N134	Finoglow SU -7W/827 Warm White Lamp	2700	400	G23	114	137
09N131	Finoglow SU -9W/865 Cool Daylight Lamp	6500	565	G23	144	167
09N132	Finoglow SU -9W/840 Cool White Lamp	4000	600	G23	144	167
09N134	Finoglow SU -9W/827 Warm White Lamp	2700	600	G23	144	167
11N131	Finoglow SU -11W/865 Cool Daylight Lamp	6500	850	G23	214	237
11N132	Finoglow SU -11W/840 Cool White Lamp	4000	900	G23	214	237
11N134	Finoglow SU -11W/827 Warm White Lamp	2700	900	G23	214	237
18N141	Finoglow FLL SU-18W- 4Pin/865 Cool Daylight Lamp	6500	1200	2G11	217	223
18N142	Finoglow FLL SU-18W- 4Pin/840 Cool White Lamp	4000	1200	2G11	217	223
18N144	Finoglow FLL SU-18W- 4Pin/827 Warm White Lamp	2700	1200	2G11	217	223
36N141	Finoglow FLL SU-36W- 4Pin/865 Cool Daylight Lamp	6500	2900	2G11	410	416
36N142	Finoglow FLL SU-36W- 4Pin/840 Cool White Lamp	4000	2900	2G11	410	416
36N144	Finoglow FLL SU-36W- 4Pin/827 Warm White Lamp	2700	2900	2G11	410	416

Also available in 4 pin version.



Non Retrofit Double U




Finoglow Non-Retrofit Double U has two 'U' shaped tubes in conventional ballasts. They are best suited for miniature luminaires and down lights for shallow recesses. They have twice the luminous flux at the same length as Finoglow single lamps.

Only 20 to 25% of the power is consumed in comparison to ordinary GLS bulbs. Finoglow Double U is compact. It lasts up to 8 times longer in comparison with ordinary bulbs with G24 d1 base. The lamps have a built-in starter and RF suppression capacitor. Finoglow Double U has the same radial luminous intensity distribution as that of an ordinary bulb.

Applications : For domestic purpose - Used in decorative home lighting fixtures.

For commercial purpose - Used in ceiling lighting or as a down lighter in Restaurants, Hotels, Shops, Corridors, Retail shops, Hotels, Business centres, IT centres and Offices.

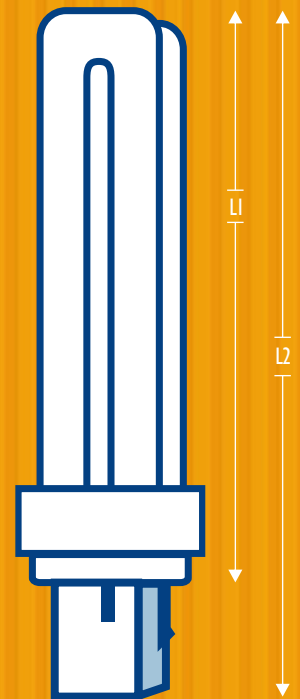

Code	Lamp Description	Color Temperature	Luminous Flux	Cap	Length L1 (mm) Max	Length L2 (mm)
10N231	Finoglow DU -10W/865 Cool Daylight Lamp	6500	565	G24d1	87	110
10N232	Finoglow DU -10W/840 Cool White Lamp	4000	600	G24d1	87	110
10N234	Finoglow DU -10W/827 Warm White Lamp	2700	600	G24d1	87	110
13N231	Finoglow DU -13W/865 Cool Daylight Lamp	6500	850	G24d1	115	138
13N232	Finoglow DU -13W/840 Cool White Lamp	4000	900	G24d1	115	138
13N234	Finoglow DU -13W/827 Warm White Lamp	2700	900	G24d1	115	138
18N231	Finoglow DU -18W/865 Cool Daylight Lamp	6500	1140	G24d2	130	153
18N232	Finoglow DU -18W/840 Cool White Lamp	4000	1200	G24d2	130	153
18N234	Finoglow DU -18W/827 Warm White Lamp	2700	1200	G24d2	130	153
26N231	Finoglow DU -26W/865 Cool Daylight Lamp	6500	1700	G24d3	149	172
26N232	Finoglow DU -26W/840 Cool White Lamp	4000	1800	G24d3	149	172
26N234	Finoglow DU -26W/827 Warm White Lamp	2700	1800	G24d3	149	172

Also available in 4 pin version.